



LN series vertical laminar flow cabinets are designed for the applications with non-hazardous materials in particle free environment and offer complete product protection. LN series LAF cabinets are ideal for handling non-pathogenic samples, cell and tissue cultures. They are mostly used in microbiology for controls; pharmaceutical industry for product preparation; food industry for quality control; electronic and optic industry and in many other areas where product protection is essential.

The outer body of the cabinets is made of epoxy-polyester painted steel and the working table is made of single piece stainless steel for easy cleaning and decontamination.

Pre-filter has G4 efficiency for particles  $\geq 0.5 \mu\text{m}$  and HEPA filter has H14 efficiency for particles  $\geq 0.3 \mu\text{m}$ . Both filters are easily accessible for replacement.

The LAF cabinets are completely microprocessor controlled and the control panel includes:

- On / Off switch
- Elapsed hour counter
- Reduced airflow speed button
- Light on / off button
- 15-min U.V. light timer control button
- Alarm led
- Digital display for airflow speed
- Airflow speed leds

Airflow speed is controlled continuously by the microprocessor control system and the airflow speed is always kept at  $0.4 \text{ m/s}$  by means of the automatic speed compensation system against clogged HEPA filter. In case of any failure, the user is also warned by audible and visible alarms for lower or higher airflow speed.

The HEPA filtered air is recirculated partially through the hollow side and back panels and thus the lifetime of both pre and HEPA filters are prolonged. By means of the recirculating air, the air blown towards the operator is also reduced.

In addition to all of these advantages, LN series LAF cabinets offer excellent ergonomic conditions with high light intensity and low noise level and each product is delivered with its quality control certificate.



## TECHNICAL SPECIFICATIONS

	LN 090	LN 120
HEPA Filter	99.999 % efficiency for particles $\geq 0.3 \mu\text{m}$ (H14 Class according to EN 1822)	
Pre-Filter	85 % efficiency for particles $\geq 0.5 \mu\text{m}$ (G4 Class according to EN 779)	
Partide Count	Better than US Fed Std 209D Class 10 and VDI 2083 Class 3	
Cabinet	Epoxy-polyester painted cold rolled steel sheet 2 mm.	
Work table	AISI 304 Stainless Steel	
Airflow speed control	Microprocessor control system with digital display and automatic speed compensation for rising filter resistance	
Blower	Highly efficient centrifugal type with lifetime lubricated bearings	
Light	High intensity, low wattage $\geq 800$ lux	
Noise level	$\leq 58$ dBA	
Standard Accessories	Elapsed hour counter, 2 pcs. mains power socket (2.5A)	
Power Supply	230 V, 50/60 Hz.	
Power Consumption	760 W	760 W
Internal Dimensions (WxDxH) mm	885x630x630	1190x630x630
External Dimensions (WxDxH) mm	1050x790x1390	1355x790x1390
Packing Dimensions (WxDxH) mm	1150x850x1480	1460x850x1480
Net / Packed Weight kg.	144/180	185/200

### OPTIONAL ACCESSORIES


- S17 004 Support stand for LN 090
- S17 003 Support stand for LN 120
- M08 022 Gas valve
- M08 020 Vacuum valve
- K04 266 Front enclosure with U.V. light for LN 090
- K04 267 Front enclosure with U.V. light for LN 120



Microprocessor Control Panel



View from the inside of cabinet

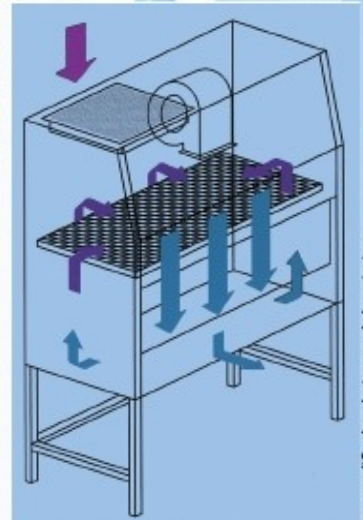

Air flow direction



## NUVE SANAYİ MALZEMELERİ İMALAT VE TİCARET A.Ş.

Esenboğa Yolu, 22 km.  
Akyurt 06750 ANKARA TURKEY  
Tel : (90.312) 399 28 30-31-32 - 399 24 87  
Fax : (90.312) 399 21 97  
http : //www.nuve.com.tr  
e-mail : sales@nuve.com.tr

ISO 9001:2000  
ISO 13485:2003

